Licence No:

DAW/TC/L/MRS/S(5).04.96

OUTGOING

PERMIT

ENVIRONMENT AGENCY

ENVIRONMENTAL PROTECTION ACT 1990 (SECTION 37)

ENVIRONMENT ACT 1995

NOTICE OF VARIATION OF WASTE MANAGEMENT LICENCE

To the licence holder: Mr A. Gorman

Of: "Corries"
Exeter Road
Dawlish
Devon
Ex7 0PD

WHEREAS the DEVON COUNTY COUNCIL as Waste Regulation Authority and in pursuance of Section 5 of the Control of Pollution Act 1974 granted a licence number WR/L/SY/S(5).11.92 to treat and keep waste on the land described in the licence dated 11th November 1992 subject to the conditions set out therein

NOTICE IS HEREBY GIVEN that the waste regulation authority of the ENVIRONMENT AGENCY modifies the details relating to the licence holder(s) and the conditions to which the licence is subject by substituting the conditions set out in the following pages of this notice in place of all previous conditions.

Such variation shall take effect on the 29th April 1996 at midnight

NB **The person served with this notice may appeal against the authority's decision to the Secretary of State within six months or such longer period as the Secretary of State may allow. (See notes at the back of this licence).**

FILE COPY

WASTE MANAGEMENT LICENCE - METAL RECYCLING SITE - ANDY GORMAN, 30-31, SHUTTERTON INDUSTRIAL ESTATE, EXETER ROAD, DAWLISH.

SITE LICENCE INDEX **LICENCE NO. - WR/L/MRS/S(5)**

National Grid Reference: SX 968784

Page No.

LICENSEE'S ADDRESS AND SITE LOCATION 1

INDEX 2

ENDORSEMENTS 4

SECTION 1 ..... Operational Control, Administration and Financial Provision 6

SECTION 2 ..... Site Development and Operation 11

SECTION 3 ..... Environmental Control 18

SECTION 4 ..... Site Restoration 19

APPENDIX I ..... Waste Authorised by this Licence 20

APPENDIX II ..... List I & List II Substances as defined by EEC Groundwater Directive 80/68/EEC 22

APPENDIX IIIA ..... Assessment of groundwater in relation to drinking water quality standards 23

APPENDIX IIIB ..... Assessment of surface water in relation to EEC Dangerous Substances Directive 76/464/EEC 24

APPENDIX IVA ..... Minimum monitoring requirements for groundwater 26

APPENDIX IVB ..... Minimum monitoring requirements for surface water 26

APPENDIX V ..... Ionic balance check 27

APPENDIX VI ..... Environmental Monitoring 28

LICENCE AGREEMENT 31

SCHEDULE A ..... **1** ..... **Plans**

(a) ..... Site Plan

(b) ..... Location Plan

2 ..... **Trigger Levels**

(a) ..... Groundwater

(b) ..... Surface Water

SCHEDULE B ..... **1** ..... **The Working Plan**

(a) ..... Site History

(b) Site Development and Infrastructure
(c) Waste Handling Procedure
(d) Operations
(e) Emergency Procedures
(f) Environmental Monitoring
(g) Site Restoration
(h) Maintenance and upkeep
(i) Site Drawings

2 **Annual Site Review - (Confidential)**

3 **Superseded Working Plan Details**

4 **Certified Engineering Reports**

SCHEDULE C **Appeals**
SCHEDULE D **Relevant Offences**
SCHEDULE E **Technical Competence**

DEFINITIONS

Where definitions are used in the conditions of this licence they shall have the meaning given to them by the following Acts & Regulations:

The Control of Pollution Act 1974
The Control of Pollution (Special Waste) Regulations 1980 [SI 1980 No 1709]
The Collection and Disposal of Waste Regulations 1988 [SI 1988 No 819]
The Control of Pollution (Amendment) Act 1989
The Environmental Protection Act 1990
The Controlled Waste (Registration of Carriers and Seizure of Vehicles) Regulations 1991 [SI 1991 No 1624]
The Environmental Protection (Duty of Care) Regulations 1991 [SI 1991 No 2839]
The Controlled Waste Regulations 1992 [SI 1992 No 588]
The Waste Management Licensing Regulations 1994 [SI 1994 No. 1056]
The Waste Management Licensing (Amendment etc.) Regulations 1995 [SI 1995 No. 288]
The Environmental Protection Act 1995
The Waste Management Licensing Regulations 1996

European Community (1975). Council Directive on waste, 75/442/EEC.
European Community (1976). Dangerous Substances Directive on pollution caused by certain substances discharged in the aquatic environment of the community 76/464/EEC
European Community (1979). Council Directive on the protection of groundwater against pollution caused by certain dangerous substances, 80/68/EEC.
European Community (1991). Council Directive amending directive 75/442/EEC, (91/156/EEC)
European Community (1991). Council Directive on hazardous waste 91/689/EEC

ENDORSEMENTS

ENDORSEMENTS
(Continued)

SECTION 1 OPERATIONAL CONTROL, ADMINISTRATION AND FINANCIAL PROVISION

1.1 Definition of the Agency

The Agency and any officer of the Agency authorised to perform the regulatory function of the Agency.

1.2 Definition of the Site (SCHEDULE A3)

(a) The extent of licensed activities. The area outlined in green on the site plan Reference 92/23/02 attached to this licence, denotes the boundary within which activities controlled by this licence must be undertaken. No such activities can take place outside the area bounded by the green line on the site plan.

(b) The extent of storage, handling, deposit, keeping and treatment of waste. The area outlined in red on the site plan Reference 92/23/02 attached to this licence, denotes the boundary within which the storage, handling, deposit, keeping and treatment of waste must be undertaken. No waste can be stored, handled, deposited, kept or treated outside the area bounded in red on the site plan.

1.3 Technical Competence (SCHEDULE E)

(a) A person or persons in charge of the supervision of the site shall have been assessed as to his technical competence by the Agency, in accordance with the scheme as set out in the 2nd edition of the report "Technical Competence in the Metal Recycling Industry".

(b) The licence holder shall ensure that sufficient technical competence is provided at the site at all times when the site is open.

(c) A list of technically competent persons involved in the management of the site shall be submitted to and agreed in writing by the Agency. The Agency shall be notified immediately in writing of any change in the technically competent management.

(d) **Waste shall not be accepted at the site at any time when technically competent management is not available.**

1.4 Supervision

(a) Sufficient management and supervision shall be provided at the site throughout the permitted operating hours to ensure that operations comply with licence conditions. Other persons employed on the site shall be instructed on those conditions appropriate to their function and the responsibilities the licence conditions impose upon them.

(b) The minimum staffing complement shall be defined in the Working Plan and agreed in writing by the Agency.

(c) The acceptance and disposal of waste shall at all times be the responsibility of the licence holder. The status of the person who is given responsibility for the daily control of the site shall be such that his decisions represent those of the licence holder. For the purposes of this licence this person shall be defined as the 'nominated person'.

1.5 Working Plan (SCHEDULE B1)

(a) The drawings and statement of intended methods of operation submitted as part of the application for this licence and any later drawings or written statements received and agreed in writing by the Agency in substitute for, or in the augmentation of such drawing and statement will hereinafter be referred to as the "Working Plan".

(b) Subject to the terms of this Licence the holder shall conduct operations in accordance with the agreed Working Plan. Any condition in this licence will take precedence over any statements contained in the Working Plan.

(c) The Working Plan shall be agreed by the Agency prior to the commencement of any site preparation and development work referred to in the licence conditions.

(d) At the written request of the Agency the Working Plan shall be reviewed by the licence holder in consultation with the Agency and the details documented in writing to the Agency.

(e) The Agency shall be notified in writing at least one month in advance of any proposed change in the actual conduct of operations from the proposals shown in the Working Plan. Such change shall not be implemented without the prior written agreement of the Agency. The agreed changes shall become incorporated into the Working Plan.

(f) Once the changes have been agreed by the Agency the Working Plan shall be updated to show each change and two copies of the amendments Working Plan shall be forwarded to the Agency.

1.6 Waste Categories and Restrictions

(a) The categories of wastes permitted to be kept at the site are listed and detailed in APPENDIX I:

(b) No other wastes are permitted at the site.

(c) The total quantity of waste received at the site shall not exceed:

Quantity in tonnes per year	**780**

The daily intake of waste to be received shall be limited to such quantities as can be managed readily by the personnel, plant and machinery available at the time to comply with the Working Plan. No receipt, storage, treatment, or handling of waste shall be made when the site is unmanned (See Condition 1.4).

(d) The total quantity of waste to be accepted at the site shall not at any time exceed the maximum capacity of the storage areas as detailed in the Site Plan Ref No.92/23/02.

(e) A full analysis shall be obtained by the licence holder for material known to be contaminated, or waste which the licence holder has reason to believe may be contaminated, prior to its acceptance at the site.

(f) Analyses of all samples required by this licence shall be obtained from a laboratory for which analytical methods have been formally accredited by third party assessment to European Standard EN: 45000 (e.g. NAMAS), or other alternative laboratory standard as agreed in writing by the Agency.

(g) Where contaminated material is accepted, for which agreement of the Agency has been given, this must be accompanied by the form (WR/SOL/1) issued by the Agency.

1.7 Hours of Operation

(a) Material shall not be handled at the site except during the following times.

Monday to Friday	08:00 - 17:00 hours
Saturday	08:00 - 12:30 hours
Sunday and Public Holidays	09:00 - 11:00 hours

(b) Except in cases of emergency no deposit shall take place outside these hours without the prior written agreement of the Agency. All cases of emergency shall be reported to the Agency immediately and the details entered in the site dairy.

1.8 Records, Reports and Registers

(a) The licence holder shall keep and maintain all records required in this licence. Excepting a more specific condition, all such records shall be kept in the site office or in secure container on site and shall be made available to the Agency whenever required.

(b) Records of documentation shall be kept and maintained to allow easy access to information on:

(i) The registration numbers of the vehicles entering the site carrying waste for disposal and their metric tonnage.
(ii) The certificate number of their Carrier of Waste Registration Certificate.
(iii) The source of the waste (County).
(iv) The registration number and tonnage of the vehicle and the destination, name address and certificate number of the carrier removing waste from the site (including unauthorised wastes).
(v) Transfer notes for materials entering and leaving the site.

(c) A weighbridge or scales shall be provided and used to record the weight of waste imported as required by condition 1.8 (b)(i). In the event of weighbridge facilities not being available (e.g. due to maintenance or breakdown) then the weight of waste entering the site shall be calculated for 1.8 (b)(i) based upon the carrying capacity of each vehicle and a density figure as detailed in the Working Plan and agreed in writing with the Agency.

(d) Calendar monthly summaries of the waste input and that being taken away from the site, shall be sent to the Agency annually on the form (ref)supplied by the Agency and shall be received by the Agency no later than the 28th February of each year. The information sent to the Agency need not be specific in the types of scrap metal but shall include:

(i) tonnage of waste received at the site.
(ii) tonnage of waste removed from the site as unauthorised (to include licensed facility to which waste was taken)
(iii) Source of waste (within or outside Devon County Boundary).

(e) The licence holder shall undertake an annual review of records and procedures and produce a report which shall be submitted to the Agency on the first working day of February each year. The report shall include:

(i) A review of all routine monitoring data and any results from investigations that may have been undertaken. The report is to highlight any pollution risks to the surrounding environment;
(ii) A review of waste management practices and control;
(iii) An overview of site development;
(iv) Details of any amendments to the Working Plan;
(v) Annual waste input rates at the site as a summary of information supplied in condition 1.8 (d);
(vi) Summary of complaints received from individuals or organisations relating to operations at the site;
(vii) Inspection frequencies for vermin, bird, insect control and inspection report findings.

(viii) Following agreement by the Agency, the report shall become incorporated into SCHEDULE B2.

(f) From the date of issue of this licence, the licence holder shall maintain all analysis results which are provided as a requirement of condition 1.6 (f). These records shall be maintained by the licence holder for inspection by the Agency until a certificate of completion has been issued for the site.

(g) A site diary shall be maintained on site to record significant dates and events which shall include dates of commencement and completion of all engineering and construction works, plant breakdown, emergencies, unauthorised waste, sampling exercises, severe weather, environmental problems, remedial action and any other details required by this licence.

(h) The site shall be equipped with a radio or telephone link.

(i) A copy of this Licence, subsequent modifications and the contemporary Working Plan shall be available on site where it can be read by the site staff and any visitors during normal hours of operation.

1.9 Temporary Cessation

Not less than 14 days prior notice shall be given in writing to the Agency when operations are to commence (or recommence in the event of a temporary cessation of operations for a period in excess of three months.)

1.10 End of Operations

The licence holder shall inform the Agency in writing of the date when operations at the site are to cease.

1.11 Site Licence Contraventions

(a) No waste shall be accepted or handled at the site at any time when any condition of this licence is being contravened and action, which is viewed appropriate by the Agency, is not being taken to remedy the situation. Operations shall not recommence without the prior written agreement of the Agency.

(b) **It is an offence contrary to section 33(6) of the Environmental Protection Act 1990 to contravene any condition of this licence.**

1.12 Reception of Waste

(a) On arrival, all vehicles shall report to the nominated person who shall establish the type, origin and quantity of waste delivered, whether the waste complies with the stated description and whether it is authorised under the terms of this licence. If a load is suspected to contain material other than that authorised by this licence then the load must be refused entry to the site.

(b) Measures which the nominated person shall implement to minimise the quantity of unauthorised material being brought to the site shall be detailed in the Working Plan and agreed in writing by the Agency.

SECTION 2 SITE DEVELOPMENT AND OPERATION

2.1 Site Preparation Works

(a) Site preparation works necessary to ensure the integrity of the site in terms of pollution control and to ensure complaince with any condition of this licence, shall be completed to the standards detailed in the agreed Working Plan, or as agreed in writing with the Agency. Any works necessary may be completed in phases and as agreed in writing with the Agency. A competent and appropriately qualified person shall supervise all engineering and construction preparatory works.

(b) The Agency shall be notified in writing at least 5 working days prior to the commencement and completion of any engineering works to permit inspection and where necessary agreement of the works.

(c) The certified records, where available, of the site preparatory works shall be sent to the Agency and when agreed these documents shall form part of SCHEDULE B4 of this licence.

2.2 Identification Board

(a) An identification board of durable material and finish, in a form acceptable to the Agency shall be displayed at the entrance to the site. The board shall show:

(i) The name of the site.
(ii) The name, address and telephone number of the licence holder and the Agency
(iii) The telephone number and name of a person to be contacted in case of an emergency.
(iv) The hours of operation of the site.

(b) The board shall be maintained in a legible condition to the satisfaction of the Agency throughout the operative period as defined by condition 3.4. Any changes to the information given on the board shall be incorporated into the board within one month of such a change.

2.3 Security

(a) Gates, fences, hedges and tree boundaries shall be provided and maintained as detailed in the Working Plan, around the entire boundary of the site to a minimum height of 2.0 metres to prevent unauthorised access.

(b) Gates adjacent to the public highway shall be securely locked shut at all times outside the operational period or when the site is unsupervised.

(c) All damage to gates, fences hedges and tree boundaries which impairs their effectiveness shall be repaired as soon as practicable with at least temporary but secure repair being achieved by the end of the working day on which the damage occurs.

(d) Control over the licensed area shall be exercised to prevent any interference with the waste on site by unauthorised persons in accordance with details included in the Working Plan and agreed in writing by the Agency.

2.4 Site Access Road

(a) The site access road from the public highway shall be:

(i) constructed from concrete or tarmac, and shall be formed to be self draining.
(ii) capable of being swept by a mechanical sweeper and taking loaded vehicles without deformation.
(iii) shall be maintained in good repair such that any pothole is repaired within 5 working days.

(b) All drains and inlets shall be inspected weekly and shall be kept free from mud and debris.

2.5 Site Drainage

(a) Surface water shall be separated from contaminated water generated on the site. During the operations, action shall be taken to minimise the volume of surface water entering the site.

(b) Water shall be prevented from accumulating on the site. Adequate drainage shall be provided in accordance with condition 2.18 (b).

2.6 Road Cleaning

(a) The site access road and public highway shall be swept or washed as frequently as is necessary or as required by the Agency to ensure that vehicles leaving the facility do not deposit any slurry, mud or other debris on the public highway.

(b) Should the public highway become fouled, the further receipt of waste shall cease until cleaning of the highway has been undertaken to the satisfaction of the Agency.

2.7 Storage Tanks

(a) Waste oils, fuel oils and other liquids shall be stored in tanks or drums. Tanks or drums shall be contained within an impervious, leak-proof containment compound (except for those containing clean water only) such that the capacity exceeds 110% of the capacity of the largest tank or drum. Draw and fill pipes shall be within the curtilage of the compound except for flexible filling pipes during filling. All plant and equipment shall be attended during filling to prevent spillage.

(b) The containment compound shall be inspected daily and kept free from water and debris to ensure that greater than 105% of the capacity of the largest tank or drum remains at all times.

(c) The containment compound shall be marked with a line to indicate the level at which less than 105 % of the capacity of the largest tank or drum remains. This shall be regarded as an action level and should quantities of water and/or debris exceed this level then immediate action shall be taken to clear the containment compound. Material removed from the containment compound shall be disposed of at a suitably licensed site or other site as detailed in the Working Plan and agreed in writing by the Agency.

(d) Tanks and drums shall be labelled to show their contents.

(e) Any failure in the integrity of the compound shall be repaired immediately. Fuel and oil shall be removed from the tank or drum pending any repair or maintenance of the containment compound and stored in an alternative tank or drum contained as for 2.7(a).

2.8 Storage of Waste

No unauthorised waste shall be kept, stored or stockpiled within the licensed area

2.9 Sorting, Processing and Storage of Scrap Metal

(a) Scrap metal, including containers holding scrap metal, shall be sorted, processed and stored only on an impermeable surface which is drained to a sealed drainage system or to a consented discharge, or as detailed in the working plan. For the purpose of this licence, a"sealed drainage system" means a drainage system with impermeable components which does not leak and which will ensure that:-

(I) no liquid will run off the pavement otherwise than via the system; and

(ii) except where they may be lawfully discharge, all liquids entering the system are collected in a sealed sump

(b) Water-miscible wastes shall be stored on an impermeable pavement, which is barriered and is served by a sealed sump. These wastes shall not be discharged through an interceptor.

(c) Sealed tanks, sumps and interceptor tanks shall be inspected daily, or as detailed in the working plan. The tanks and sumps shall not be allowed to over fill A method shall be devised to ensure that action is taken immediately to have them emptied once they reach 85% of their capacity, or as detailed in the working plan. An entry shall be made in the site diary when an inspection has been carried out and a further entry when the tanks and sumps have been emptied.

(d) Waste motor vehicles from which all oils and other fluids have been drained may be stored on a hardstanding. Waste motor vehicles which still contain oils and other fluids, shall be stored on an impermeable pavement which is drained to a sealed drainage system as defined in 2.9(a) above.

(e) Scrap Metal shall only be sorted, processed and stored in the locations shown in the working plan. Provisions shall be made for the storage of waste generated as a result of operations at the facility as detailed in the working plan.

2.10 Engines and Transmissions

Engines and transmissions shall be removed from motor vehicles in the vehicle dismantling area in accordance with Condition 2.14. Waste engines and transmissions or, as the case may be, any container in which they are stored, shall be stored on an impermeable pavement, which shall have impermeable kerbs and drained to a sealed drainage system as defined in 2.9(a). If the engines are to be left in the vehicles, the engine compartment must be kept covered to prevent the ingress of water until the vehicle is finally removed from the site as scrap waste.

2.11 Petrol Tanks

All petrol tanks shall be drained on arrival in the open air, and the fuel should either be immediately transferred to the operators own vehicles or stored in a suitable tank covered by the Petroleum Act. This tank should be covered by a warning notice. Petrol tanks should be drained in a designated area at least 5 metres from any electrical apparatus or other sources of ignition.

2.12 Tyres

Except for those which are already fitted to scrap motor vehicles accepted at the site, tyres **shall not** be accepted at the facility.

2.13 Transformers & Capacitors

Transformers and capacitors **shall not** be accepted at the site.

2.14 Vehicle Dismantling, Crushing & Shearing

(a) The dismantling, crushing and shearing of motor vehicles shall only take place in the areas as shown in Site Plan Ref no. 92/23/02. No dismantling, crushing or shearing of motor vehicles shall take place unless all engine oils, transmission oils, brake and clutch fluids and engine coolants have first been drained from the vehicles, or as detailed in the working plan. These oils and fluids must be drained into suitable containers and not allowed to drain on to the ground. All drain plugs shall be replaced on the vehicle after draining. The draining, dismantling, crushing and shearing of motor vehicles shall be carried out on an impermeable pavement,(e.g. concrete), and drained to a sealed drainage system as defined in Condition 2.9(a) above. All liquids are to be stored in accordance with Condition 2.7.

(b) Impermeable pavements that are under cover must either be drained to a sealed drainage system as defined in Condition 2.9(a) above, or shall have raised impermeable kerbs at the pavement edges of that area, so as to allow complete containment.

(c) Leaking vehicles, engines or transmissions removed from the vehicles shall be stored on an impermeable surface and drained to a sealed drainage system as defined in Condition 2.9(a) above.

2.15 Refrigeration Equipment

Refrigeration equipment shall not dismantled or crushed unless proper arrangements have been made for the removal and disposal of the CFC's from the cooling systems. Details of the disposal route for the CFC's shall be detailed in the Working Plan and agreed in writing with the Agency.

2.16 Batteries

Batteries shall be handled in such a manner that they are not damaged and their contents are not spilled or otherwise allowed to escape from their casing. All lead/acid batteries or, as the case may be, any container in which they are stored, shall be stored on an impermeable pavement, which shall have impermeable kerbs to provide complete containment. The container or the area shall be covered so as to prevent ingress of water into it.

2.17 Gas cylinders

All gas cylinders not in use shall be stored in an upright position. Oxygen and flammable gases should be stored separately or, if this is not possible, have a minimum separation of 3 metres.

2.18 Queuing and Parking

(a) Adequate queuing space off the public highway and commensurate with the scale of operation shall be provided for vehicles entering the site.

(b) Adequate parking space off the public highway and commensurate with the scale of operation shall be provided for staff and visitors using the site.

(c) Details of the queuing and parking arrangements for the site shall be detailed in the Working Plan and agreed in writing by the Agency

2.19 Lighting

If operations at the site are undertaken during the hours of darkness (as defined by The Road Vehicle Lighting Regulations 1989), then adequate lighting shall be provided and used to illuminate all operating areas of the site as detailed in the Working Plan and agreed in writing with the Agency.

2.20 Fires

(a) **No fires shall be permitted on site.**

(b) A fire on site shall be regarded as an emergency and immediate action shall be taken to extinguish it. Procedures to be adopted in the case of fire shall be detailed in the Working Plan and agreed in writing by the Agency in consultation with the Devon Fire and Rescue Service. The procedures shall be displayed where all persons employed at the site can readily read them. Persons employed at the site shall be instructed on the content of the procedures. The displayed procedures shall be maintained in a legible condition to the satisfaction of the Agency.

(c) Should fire break out anywhere within the site, the area of the fire shall be effectively sealed-off and no further waste shall be accepted until the fire has been extinguished. The licence holder shall notify the Agency immediately of any outbreak of fire. Details of the incident shall be confirmed in writing within 48 hours.

(d) The emergency procedures for dealing with fires on the site shall have regard for the possible danger and increased pollution threat to the environment caused by extinguishing the fire with water. Every attempt shall be made to minimise this pollution potential. Water supplies for fire fighting purposes and portable fire fighting equipment shall be available and maintained. Water supplies shall be suitably protected against freezing.

2.21 Weed Control

Measures shall be taken, in accordance with guidance given in "Weed Control and Environmental Protection" (ISBN 0 11 752708 4), to control or destroy weeds on all areas of the site. Particular attention shall be paid to controlling noxious and injurious weed species e.g. Common Ragwort (*Senecio jacobaea*), Broad Leaved Dock, Curled Dock, Creeping Thistle (*Cirsium arvense*), Spear Thistle (*Cirsium vulgare*), Himalayan Balsam (Impatiens glandulifera), Wild Oats and Japanese Knotweed (*Reynoutria japonica*). Control measures shall be specified in the Working Plan and shall agreed in writing by the Agency. Wherever possible environmentally friendly products or methods shall be used. If herbicides are used then these shall not be allowed to enter any controlled water.

2.22 Maintenance and Breakdown

(a) All equipment used on the site shall be maintained in good working order.

(b) Any temporary cessation as a result of plant or equipment breakdown which requires the diversion of wastes away from the site shall be notified to the Agency immediately. Details of the diversion arrangements and contingency measures to be taken shall be as detailed in the Working Plan and agreed in writing by the Agency.

2.23 Noise and Vibration

The Licence holder shall adopt the best practicable means to minimise the levels of noise arising from the development.

2.24 Pest Control

(a) All necessary precautions shall be taken and regular inspections of the site made to prevent the infestation of birds, vermin, or insects, on the site. A best practicable means of control shall be used.

(b) Any suspected infestation, where control is not achievable by the licence holder shall be reported to a competent pest control operator for immediate action as detailed in the Working Plan and agreed in writing by the Agency.

(c) A record of all such infestation and action taken to alleviate the problem shall be maintained in the site diary for inspection by an authorised officer of the Agency.

(d) Where vermin have been controlled using a rodenticide, the bodies shall be immediately bagged and removed to a suitably licensed facility. Wherever possible environmentally friendly products shall be used for the control of vermin.

2.25 Odour Control

Operations shall be carried out in such a way as to minimise the risk of nuisance from odours.

2.26 Dust

In dry weather site roads and any activity which gives rise to the creation of dust, shall be sprayed with water to suppress dust. If water is obtained from the public water supply mains then this activity shall cease on the instruction of the Statutory Water Undertaker.

2.27 Litter Control

Adequate measures shall be taken to:

(a) Prevent litter from being blown from the site.

(b) Ensure that the site, including its boundaries is kept clear of litter and rubbish irrespective of its source.

(c) Ensure any litter deposited beyond the site boundaries as the direct result of operations is collected and properly disposed of.

(d) The site and immediate area (within 10 metres of the perimeter fence) shall be kept free of litter.

2.28 Special Wastes and Waste Handling(Schedule B(c))

The acceptance of Special Wastes is only authorised by this licence, if it consist of the contents of motor vehicle batteries, or which forms part of, or is contained in, a waste motor vehicle and was necessary for the normal operation of the vehicle. Procedures for the safe storage and handling of wastes as detailed below, shall be included in the working plan, or as agreed in writing with the Agency:-

special wastes (Appendix I, Category G)
tyres
fluids-oil, petrol, brake fluid, battery acids, coolant, and all other fluids
asbestos-bonded and fibrous
batteries
gas containers-bottles, air bags
materials containing dioxins and Polychlorinated Bi-phenyls (PCBs)
low density materials
dusty wastes
equipment that contains Chloroflourocarbons (CFC's)

SECTION 3 ENVIRONMENTAL CONTROL

3.1 Monitoring (SCHEDULE B.1 (f))

If required by the Agency a scheme for the monitoring and control of groundwater and surface water shall be included in the Working Plan as detailed in Appendix VI. The monitoring section of the Working Plan shall include all appropriate and necessary steps to be taken to prevent pollution of the environment, harm to human health or serious detriment to the amenities of the locality.

3.2 Protection of Watercourses

(a) No deposit shall take place until surface water drainage from the surrounding land has been diverted away from the site, or any other measures as considered appropriate by the Agency, have been implemented.

(b) No deposit shall take place until a scheme has been submitted to and agreed in writing by the Agency which details the drainage arrangements for the site including both operational and restored areas. The scheme shall specify measures to prevent material from entering any watercourse or culvert.

3.3 The Control of Polluting Discharges

(a) No discharge from the site to surrounding water courses or drainage ditches shall be permitted except in accordance with a discharge consent authorised by the Agency. The licence holder shall take all necessary steps to ensure that there is no pollution of adjacent water courses, drains or underground strata caused by the operations. In the event of any such water pollution arising as a result of surface water running off or percolating from the site, the licence holder shall, at his own expense, undertake such remedial action as may be reasonably required by the Agency.

(b) Surface waters shall only be discharged from the site by way of the drainage system as detailed in the Working Plan and agreed in writing by the Agency. There shall be no discharge to foul sewer from the site except in accordance with a consent from the Statutory Water Undertaker

(c) A copy of all discharge consents shall be supplied to the Agency.

3.4 Operative Period and Certificate of Completion

(a) The Operative period exists until a certificate of completion has been issued by the Agency.

(b) Post-operational pollution controls shall be maintained to ensure that the site presents no unacceptable risk of pollution of the environment, harm to human health or serious detriment to the amenities of the locality pending the issue of a certificate of completion. Remedial works shall be undertaken to repair or replace damaged or deteriorating management and monitoring systems throughout the operational period.

SECTION 4 SITE RESTORATION

4.1 Site Restoration

A scheme for the reinstatement of the site shall be detailed and agreed in writing by the Agency prior to any reinstatement works being carried out.

4.2 Failure to Restore the site

Failure to restore the site to the standard agreed with the Agency within six months of the cessation of the acceptance of waste at the site, may be construed as a breach of licence conditions.

APPENDIX I

WASTE	AUTHORISED
Motor Vehicles	
Engines	
Batteries	
Ferrous Metals	
Non-Ferrous Metals	

APPENDIX I

WASTE CATEGORY G **SPECIAL WASTE** **AUTHORISED WITH RESTRICTIONS**
(See Condition 2.28 of this licence)

Special Waste shall apply to any controlled waste which;

(a) consists or contains any of the substances listed in Part I (below) and by reason of the presence of such substance,
   (i) is dangerous to life within the meaning of Part II (below), or
   (ii) has a flash point of 21^{0}C or less as determined by the methods and with the apparatus laid down by the British Standards Institution in BS 3900: Part A, 8: 1976 (EN53), or

(b) is a medicinal product, as defined in Section 130 of the Medicines Act 1968(b), which is available only in accordance with a prescription given by an appropriate practitioner as defined in Section 58(1) of that Act.

SCHEDULE 1

Part I

Acids and alkalis	Antimony and antimony compounds
Arsenic Compounds	Asbestos (all chemical forms)
Barium compounds	Beryllium and beryllium compounds
Biocides and phytopharmaceutical substances	Boron compounds
Cadmium and cadmium compounds	Copper compounds
Heterocyclic organic compounds containing oxygen, nitrogen or sulphur	Hexavalent chromium compounds
Hydrocarbons and their oxygen, nitrogen or sulphur compounds	Inorganic cyanides
Inorganic halogen-containing compounds	Inorganic sulphur-containing compounds
Laboratory chemicals	Lead compounds
Mercury compounds	Nickel and nickel compounds
Organic halogen compounds, excluding inert polymeric materials	Peroxides, chlorates, perchlorates and azides
Pharmaceutical and veterinary compounds	Phosphorus and its compounds
Selenium and selenium compounds	Silver compounds
Tarry materials from refining and tar residues from distilling	Tellurium and tellurium compounds
Thallium and thallium compounds	Vanadium compounds
Zinc compounds	

Part II

1. Waste to be regarded as dangerous to life for the purposes of these regulations if;
   (a) a single dose of not more than five cubic centimetres would be likely to cause death or serious damage to tissue if ingested by a child of 20 kilograms' body weight or
   (b) exposure to it for fifteen minutes or less would be likely to cause serious damage to human tissue by inhalation, skin contact or eye contact.

Special waste delivered to the site. These may include any of the Department of the Environment Categories:

Waste Category		Typical examples
A	Inorganic acids	Hydrochoric, sulphuric acids
B	Organic acids	Acid anhydrides
C	Alkalis	Ammonia
D	Toxic metal compounds	cadmium, mercury, lead solutions
G	Metal Oxides	cadmium oxide
H	Inorganic compounds	cyanide, arsenic, nitrates
J	Other inorganic materials	asbestos
K	Organic compounds	phenols, peroxides, trichloroethene, alcohols
M	Fuels, oils and greases	petrol, diesel, paraffin, vegetable oil
N	Fine chemicals and biocides	pesticides, herbicides
P	Miscellaneous chemical waste	laboratory chemicals, unidentified cans, bottles etc.
R	Tars, paint, dyes and pigments	paint, ink, varnish
T	Animal and food waste	blood, fat, glue

APPENDIX II

LIST I AND LIST II SUBSTANCES AS DEFINED BY EC GROUNDWATER DIRECTIVE (80/68/EEC)

LIST I OF FAMILIES AND GROUPS OF SUBSTANCES

These substances should be prevented from being discharged into ground water.
List I contains the individual substances which belong to the families and groups of substances specified below, with the exception of those which are considered inappropriate to List I on the basis of a low risk toxicity, persistence and bioaccumulation.

1 **organohalogen compounds and substances which may form such compounds in the aquatic environment**

2 **organophosphourus compounds**

3 **organotin compounds**

4 **substances which possess carinogenic, mutagenic or teratogenic properties in or via the aquatic environment. (*)**

5 **mercury and its compounds**

6 **cadmium and its compounds**

7 **mineral oils and hydrocarbons**

8 **cyanides**

LIST II OF FAMILIES AND GROUPS OF SUBSTANCES

Discharges of these substances into ground water should be minimised.
List II contains the individual substances and categories of substances belonging to the families and groups of substances listed below which could have a harmful effect on groundwater.

1 **the following metalloids and metals and their compounds:**

1.	**Zinc**	**2.**	**Copper**	**3.**	**Nickel**
4.	**Chrome**	**5.**	**Lead**	**6.**	**Selenium**
7.	**Arsenic**	**8.**	**Antimony**	**9.**	**Molybdenum**
10.	**Titanium**	**11.**	**Tin**	**12.**	**Barium**
13.	**Beryllium**	**14.**	**Boron**	**15.**	**Uranium**
16.	**Vanaduim**	**17.**	**Cobalt**	**18.**	**Thallium**
19.	**Tellurium**	**20.**	**Silver**		

2 **biocides and their derivatives not appearing in List I**

3 **Substances which have a deleterious effect on the taste and/or odour of ground water and compounds liable to cause the formation of such substances in such water and to render it unfit for human consumption**

4 **Toxic or persistent organic compounds of silicon and substances which may cause the formation of such compounds in water, excluding those which are biologically harmless or are rapidly converted in water into harmless substances.**

5 **inorganic compounds of phosphorus and elemental phosphorus**

6 **fluorides**

7 **ammonia and nitrites**

(*) where certain substances in List II are carcinogenic, mutagenic or teratogenic they are included in category 4 of List I

APPENDIX IIIA

ASSESSMENT OF GROUNDWATER IN RELATION TO THE DRINKING WATER QUALITY STANDARDS

Parameter	Units	Value (maximum unless otherwise stated)	Parameter	Units	Value (maximum unless otherwise stated)
Colour	mg/l Pt/Co Scale	20	**Mercury**	µg/l	1
Turbidity (including suspended solids)	Formazin turbidity units	4	**Nickel**	µg/l	50
Odour (including hydrogen sulphide)	Dilution number	3 at 25°C	**Lead**	µg/l	50
Taste	Dilution number	3 at 25°C	**Antimony**	µg/l	10
Temperature	°C	25	**Selenium**	µg/l	10
Measure of the hydrogen ion concentration	pH	9.5 (5.5 minimum)	**Boron**	µg/l	2000
Conductivity	uS/cm	1500 at 25°C	**Barium**	µg/l	1000
Chloride	mg/l	400	**Pesticides individual total**	µg/l	0.1 0.5
Calcium	mg/l	250	**PAHs**	µg/l	0.2
Total hardness	Ca mg/l	60 (minimum)	**Benzo 3,4 Pyrene**	ηg/l	10
Alkalinity	HCO_3 mg/l	30 (minimum)	**Zinc**	µg/l	5000
Sulphate	mg/l	250	**Phosphorus**	µg/l	2200
Magnesium	mg/l	50	**Fluoride**	µg/l	1500
Sodium	mg/l	150	**Silver**	µg/l	10
Potassium	mg/l	12	**Arsenic**	µg/l	50
Dry residues	mg/l	1500 (after drying at 180°C)	**Cadmium**	µg/l	5
Nitrate	mg/l	50	**Cyanide**	µg/l	50
Nitrite	mg/l	0.1	**Chromium**	µg/l	50
Kjeldhal nitrogen	mg/l	1	**Tetrachloro-methane**	µg/l	3
Oxidizability (permanganate value)	mg/l	5	**Trichloroethane**	µg/l	30
Total Organic Carbon	mg/l	No significant increase	**Tetrachloroethene**	µg/l	10
Dissolved or emulsified hydrocarbons	µg/l	10	**Substances extractable in chloroform**	mg/l dry residue	1
Phenols	µg/l	0.5	**Aluminium**	µg/l	200
Surfactants (as lauryl sulphate)	µg/l	200	**Iron**	µg/l	200
Manganese	µg/l	50	**Copper**	µg/l	3000

APPENDIX IIIB

ASSESSMENT OF SURFACE WATER IN RELATION TO THE EC DANGEROUS SUBSTANCES DIRECTIVE ON POLLUTION CAUSED BY CERTAIN SUBSTANCES DISCHARGED IN THE AQUATIC ENVIRONMENT OF THE COMMUNITY (76/464/EC)

EQSs FOR LIST I SUBSTANCES (INLAND WATERS)

Parameter	Units	Value	Status (1)
Mercury	µg/l	1.0	AA, T
Cadmium (2)	µg/l	5.0 1.0	AA,T AA,T,B (4)
Hexachlorocyclohexane (HCH) (2)	µg/l	0.1 0.05	AA,T AA,T,B (4)
Tetrachloromethane (CTC)	µg/l	12	AA,T
DDT (para-para DDT isomer) (2)	µg/l	0.01	AA,T
Total DDT (2)	µg/l	0.025	AA,T
Pentachlorophenol (2)	µg/l	2	AA,T
"The Drins" (from 1st January 1989)	µg/l	0.03 (3)	AA,T
Aldrin (from 1st January 1994)	µg/l	0.01	AA,T
Dieldrin (from 1st January 1994)	µg/l	0.01	AA,T
Endrin (from 1st January 1994)	µg/l	0.005	AA,T
Isodrin (from 1st January 1994)	µg/l	0.005	AA,T
Hexachlorobenzene (HCB) (2)	µg/l	0.03	AA,T
Hexachlorbutadiene (HCBD) (2)	µg/l	0.1	AA,T
Chloroform	µg/l	12	AA,T
1,2-dichloroethane	µg/l	10	AA,T
Trichloroethylene	µg/l	10	AA,T
Perchloroethylene	µg/l	10	AA,T
Trichlorobenzene	µg/l	0.4	AA,T

Proposals have been published for the following List I substances but these have not, so far, been adopted:

Trifluralin, endosulphan, simazine, triorganotin compounds (tributyltin oxide, triphenyltin acetate, triphenyltin oxide, triphenyltin hydroxide), atrazine, organophosphorus substances (azinphos-methyl, azinphos-ethyl, fenitrothion, fenthion, malathion, parathion, and parathion-methyl, dichlorvos).

Notes:
(1) AA= Annual Average, T=Total, B=Background Monitoring
(2) A "standstill" provision exists for concentrations in sediments and/or shellfish and/or fish
(3) Maximum of 0.005 for Endrin
(4) B=Background Monitoring: only applies at designated end of catchment sites

EQSs FOR LIST II SUBSTANCES (INLAND WATERS) (1)

Parameter	Units	Value(3)		Hardness	Status (2)
		A std	B std	(mg $CaCO_3$/l)	
Lead	µg/l	4	50	0 to 50	AA,D
		10	125	50 to 100	
		10	125	100 to 150	
		20	250	150 to 200	
		20	250	200 to 250	
		20	250	>250	
Chromium	µg/l	5	150	0 to 50	AA,D
		10	175	50 to 100	
		20	200	100 to 150	
		20	200	150 to 200	
		50	250	200 to 250	
		50	250	>250	
Zinc	µg/l	8	75	0 to 50	AA,T
		50	175	50 to 100	
		75	250	100 to 150	
		75	250	150 to 200	
		75	250	200 to 250	
		125	500	>250	
Copper	µg/l	1	1	0 to 50	AA,D
		6	6	50 to 100	
		10	10	100 to 150	
		10		150 to 200	
		10	10	200 to 250	
		28	28	>250	
Nickel	µg/l	50	50	0 to 50	AA,D
		100	100	50 to 100	
		150	150	100 to 150	
		150	150	150 to 200	
		200	200	200 to 250	
		200	200	>250	
Arsenic	µg/l	50		All	AA,D
Boron	µg/l	2000		All	AA,T
Iron	µg/l	1000		All	AA,D
pH	pH values	6 to 9		All	95% of samples
Vanadium	µg/l	20	20	0 to 200	AA,T
		60	60	200 +	
Tributyltin	µg/l	0.02		All	M,T
Triphenyltin	µg/l	0.02		All	M,T
Polychlorochlormethyl-sulphonamidodiphenyl ether (PCDSs)	µg/l	0.05		All	T, 95% of samples
Sulcofuron	µg/l	25		All	T, 95% of samples
Flucofuron	µg/l	1.0		All	T, 95% of samples
Permethrin	µg/l	0.01		All	T, 95% of samples
Cyfluthrin	µg/l	0.001		All	T, 95% of samples

Notes:

(1) National Environmental quality standards recommended for the UK.

(2) AA = Annual Average; D = Dissolved; T = Total; M = Maximum Allowable Concentration

(3) **A std** denotes standards for the protection of sensitive aquatic life
B std denotes standards for the protection of other aquatic life

APPENDIX IVA

MINIMUM REQUIREMENTS FOR GROUNDWATER ANALYSIS

Suite 1 (Reduced analysis)

Water level (m AOD)
Biochemical Oxygen Demand
Ammoniacal nitrogen (mg/l)
pH
Conductivity (µS/cm)
Chloride (mg/l)

Suite 2 (Full analysis)

Biochemical Oxygen Demand
Chemical Oxygen Demand
Conductivity (µS/cm)
Ammoniacal nitrogen (mg/l)
Chloride (mg/l)
Manganese (mg/l)
Copper (µg/l)
Lead (µg/l)
Water level (m AOD)
Sulphate (mg/l)
Nitrate (mg/l)
Total Organic Carbon (mg/l)
Potassium (mg/l)
Magnesium (mg/l)
Cadmium (µg/l)
Nickel (µg/l)
pH
Alkalinity (mg/l)
Nitrite (mg/l)
Sodium (mg/l)
Calcium (mg/l)
Iron (mg/l)
Chromium (µg/l)
Zinc (µg/l)
Temperature (°C)

Additional Analysis may be required should any groundwater trigger concentrations be significantly exceeded (selected from the parameters listed below) subject to the agreement of the Agency:

Poly Aromatic Hydrocarbons (µg/l)
Aluminium (µg/l)
Phosphorus (µg/l)
Cyanide (µg/l)
Selenium (µg/l)
Barium (µg/l)
Tetrachloromethane (µg/l)
Arsenic (µg/l)
Phenols(µg/l)
Fluoride (µg/l)
Trichloroethene(µg/l)
Boron (µg/l)
Mercury (µg/l)
Dissolved or emulsified hydrocarbons (µg/l)
Copper (µg/l)
Silver (µg/l)
Tetrachloroethene (µg/l)
Pesticides - total substances (µg/l)
Tin (µg/l)

APPENDIX IVB

MINIMUM MONITORING REQUIREMENTS FOR SURFACE WATER ANALYSIS

Analysis Suite 1 (reduced analysis)

Temperature (°C)
Dissolved Oxygen (%)
Ammoniacal nitrogen (mg/l)
pH
Conductivity (µS/cm)
Chloride (mg/l)

Analysis Suite 2 (full analysis)

pH
Chemical Oxygen Demand
Chloride (mg/l)
Dissolved copper (µg/l)
Hardness (mg/l)
Total phosphorus(mg/l)
Dissolved Oxygen (%)
Conductivity (µS/cm)
Non ionised ammonia (mg/l)
Total zinc (µg/l)
Sulphate (mg/l)
Nitrites (mg/l)
Biochemical Oxygen Demand
Ammoniacal nitrogen (mg/l)
Suspended solids (mg/l)
Dissolved iron (mg/l)
Alkalinity (mg/l)

Additional Analysis may be required should any surface water trigger concentrations be significantly exceeded, subject to the agreement of the Agency.

APPENDIX V

Ionic balance check (3 monthly on a random selection of samples)

Sodium	Potassium	Calcium
Magnesium	Ammoniacal nitrogen	Iron
Manganese	Chloride	Sulphate
Nitrate	Nitrite	Phosphate
Total alkalinity*	pH	

Total volatile acid may be required if the samples are significantly contaminated with leachate

*As $CaCO_3$ at pH 4.5

APPENDIX VI

Environmental Monitoring

The following shall be implemented immediately unless it can be demonstrated to the satisfaction of the Agency that any pollution of the environment, harm to human health or serious detriment to the amenities of the locality was not caused by any operations or activities carried out at the site

6.1 Monitoring

(a) Details required in the monitoring section of the Working Plan shall include as a minimum:

(i) The location and construction of monitoring positions.
(ii) The frequency of monitoring
(iii) Types of monitoring equipment, sampling techniques and service/ calibration history
(iv) Suites of analyses to be undertaken
(v) Presentation of results
(vi) Action to be taken if trigger levels are exceeded
(vii) Remedial works

(b) The monitoring section of the Working Plan shall be reviewed at the request of the Agency, in addition to the annual review, to take account of changing circumstances, such as may arise from the results of the monitoring programme or development within or near to the site.

(c) Costs incurred in complying with the monitoring section of the Working Plan shall be borne by the licence holder. Any measures required by the Agency to deal with pollution migration beyond the boundaries of the site shall be carried out forthwith by the licence holder and at the holders own expense.

6.2 Monitoring Positions

(a) A minimum number of 2 surface water monitoring positions shall be established outside the site. One shall be located up gradient and one down gradient of the site. Details of precise locations shall be included in the monitoring section of the Working Plan and agreed in writing by the Agency.

(b) A minimum number of 2 groundwater monitoring positions shall be located around the perimeter of the site as detailed in the monitoring section of the Working Plan. A minimum of 1 shall be up groundwater gradient and a minimum of 1 shall be down groundwater gradient of the site

6.3 Construction of Monitoring Positions

(a) Groundwater monitoring positions shall be drilled to a minimum depth of 5.0 metres below the long-term mean rest water level for the site or other depth with the prior written agreement of the Agency. Monitoring positions shall not interconnect different horizons of an aquifer or different aquifers. Monitoring positions shall be designed to sample one aquifer horizon only based on the advice of the Agency.

(b) All monitoring positions shall be constructed of materials and to a specification detailed in the Working Plan and agreed in writing by the Agency. All monitoring positions shall be maintained in good working order until the end of the Operative Period. Damaged, broken or inaccessible monitoring positions shall be repaired or replaced within 28 days of detection of such damage or other period as agreed in writing by the Agency.

(c) All monitoring positions for groundwater shall be surveyed in, with the top of the monitoring position and ground level being given in metres above ordnance datum (m AOD). The surveyed locations shall be presented on as-built drawings. All monitoring positions shall be clearly marked with reference numbers and/or letters and access shall be provided to enable monitoring to be undertaken both by the licence holder and by the Agency in accordance with the monitoring section of the Working Plan.

(d) The permanent lining in groundwater monitoring positions shall be finished off at approximately 0.5 metres above ground level. These shall be encased within a metal cover with a screw cap, or similar, to protect against vandalism or accidental damage. Alternative borehole cap designs may be permitted with the prior written agreement of the Agency.

6.4 Groundwater and Surface Water Monitoring (SCHEDULE A.2 (a) & (b))

(a) Groundwater and surface water shall be monitored, sampled and analysed as detailed in the monitoring section of the Working Plan and agreed in writing by the Agency. Consideration must be given to the standards in Waste Management Paper Numbers 4 & 26 (or their successors), and the details specified in APPENDIX IIIA and IIIB.

(b) Trigger levels shall be set for the 'principal pollution indicators' - ammoniacal nitrogen, biochemical oxygen demand, chloride and electrical conductivity - at all groundwater and surface water monitoring positions. The trigger levels for ammoniacal nitrogen, biochemical oxygen demand, chloride and electrical conductivity shall be determined as follows:

Standard deviation multiplied by two and added to the mean of the sample population.

The standard deviation for each monitoring position is calculated using the appropriate formula:

(i) Where the number of samples (n) is ≤ 30

$$s.d = \sqrt{\frac{n\sum x^2 - (\sum x)^2}{n(n-1)}}$$

(ii) Where the number of samples (n) is > 30

$$s.d = \sqrt{\frac{n\sum x^2 - (\sum x)^2}{n^2}}$$

(c) For any additional monitoring positions trigger levels shall be determined as for 6.4 (b). The trigger levels for each monitoring position shall be reviewed annually. Alternative methods of setting trigger levels may be employed with the written agreement of the Agency in consultation with the AGENCY. Where Surface Water Quality Objectives are assigned to watercourses which form part of the sampling programme these Surface Water Quality Objectives shall take precedence over those set using the statistical calculations in condition 6.4 (b). The reviewed trigger levels shall be incorporated into the annual review of the monitoring section of the Working Plan (SCHEDULE B.2).

(d) Should data obtained from the reduced analysis (suite 1) exceed the trigger concentrations for groundwater and/or surface water (as given in SCHEDULE A.2 (a) and (b) respectively) these shall be highlighted (in coloured pen or other form as agreed by the Agency) on the submitted data sheets. Where trigger levels are exceeded the appropriate action procedures as detailed in the monitoring section of the Working Plan shall be implemented. A separate system shall be used to highlight full analysis (suite 2) groundwater data which exceeds the drinking water quality standards given in APPENDIX IIIA. The same system shall be adopted for surface water results which, with reference to the EC Dangerous Substances Directive, exceed the values specified in APPENDIX IIIB.

(e) At the written request of the Agency, random samples shall be analysed for ionic balance. The stability of the sample should be such that the standard error shall be within ± 5%. Any deviations greater than this shall be investigated to determine whether the source of variation is due to incorrect sampling, storage or analysis of the samples. Anions and cations to be used for the ionic balance calculation are given in APPENDIX V

6.5 Monitoring Records

(a) All monitoring results shall be forwarded to the Agency within 7 days of the results becoming available or other time period as agreed in writing with the Agency.

(b) The monitoring results shall be submitted in their original form and not as a copy, or summary, of the data (unless specified as a requirement by the Agency). Laboratory verification of the results may be requested in writing by the Agency. An up to date copy of the records relating to at least the previous 12 months monitoring programme shall be maintained at the site for inspection by an authorised officer of the Agency.

6.6 Remedial Action

(a) Instances of observed water pollution or monitoring results exceeding the predetermined trigger levels shall be reported to the Agency immediately. Action shall be taken to minimise the environmental impact and where possible, remove the source of the pollution. No waste shall be accepted whilst trigger levels are exceeded, unless appropriate remedial action as agreed by the Agency, has been taken.

(b) **Failure to take appropriate remedial action whilst trigger levels are exceeded may be construed as a breach of licence conditions.**

Attention is drawn to all the requirements of Town and Country Planning particularly those which affect reinstatement, access and any measures to prevent the pollution of water.

Dated this TWENTY THIRD **day of** APRIL **1996**

Signed

G.R. Bateman

G. BATEMAN
DEVON AREA MANAGER

Duly authorised on behalf of the ENVIRONMENT AGENCY

Signed

H. Barker

H BARKER
DEVON AREA WASTE MANAGER

Duly authorised on behalf of the ENVIRONMENT AGENCY

Note: Failure to adhere to the above conditions constitutes a contravention of the Environmental Protection Act 1990, in respect of which the enforcement action will be taken.

1. If an applicant is aggrieved by the decision of the Environment Agency in granting a licence subject to conditions or modifying such conditions, he may appeal to the Secretary of State, Department of the Environment, in accordance with Section 43 of the Environmental Protection Act 1990. Appeals must be notified within six months of the date of this notice to the Secretary of State, Department of the Environment, Romney House, 43 Marsham Street, London, SWIP 3PY. The Secretary of State has power to allow a longer period for the giving of an appeal but he will not normally be prepared to exercise this power unless there are special circumstances which excuse the delay in giving notice of an appeal.

2. It will be necessary for the licence-holder to comply with statutory obligations under other legislation (in particular, the Health and Safety at Work etc, Act 1974, Planning, Water Protection and Environmental Health Legislation). The issue of a licence under Part II of the Environmental Protection Act 1990 does not remove the need for the licence-holder to ensure that he is able to comply with other legislation.

3. The conditions of a Waste Management Licence may be modified at any time by the waste regulation authority and will be modified in order to ensure compliance with the requirements of any statutory regulations or to prevent pollution of the environment, harm to human health, or serious detriment to amenities. A licence may be revoked, partly revoked or suspended if such pollution, danger or detriment cannot be avoided by modification of licence conditions. Additionally a licence may be revoked, partly revoked or suspended where the holder has ceased to be a fit and proper person by reason of his having been convicted of a relevant offence.


SCHEDULE A1

PLANS

(a) Site Plan
(b) Location Plan

30-31, Shutterton Industrial Estate, Exeter Road, Dawlish


Site Plan

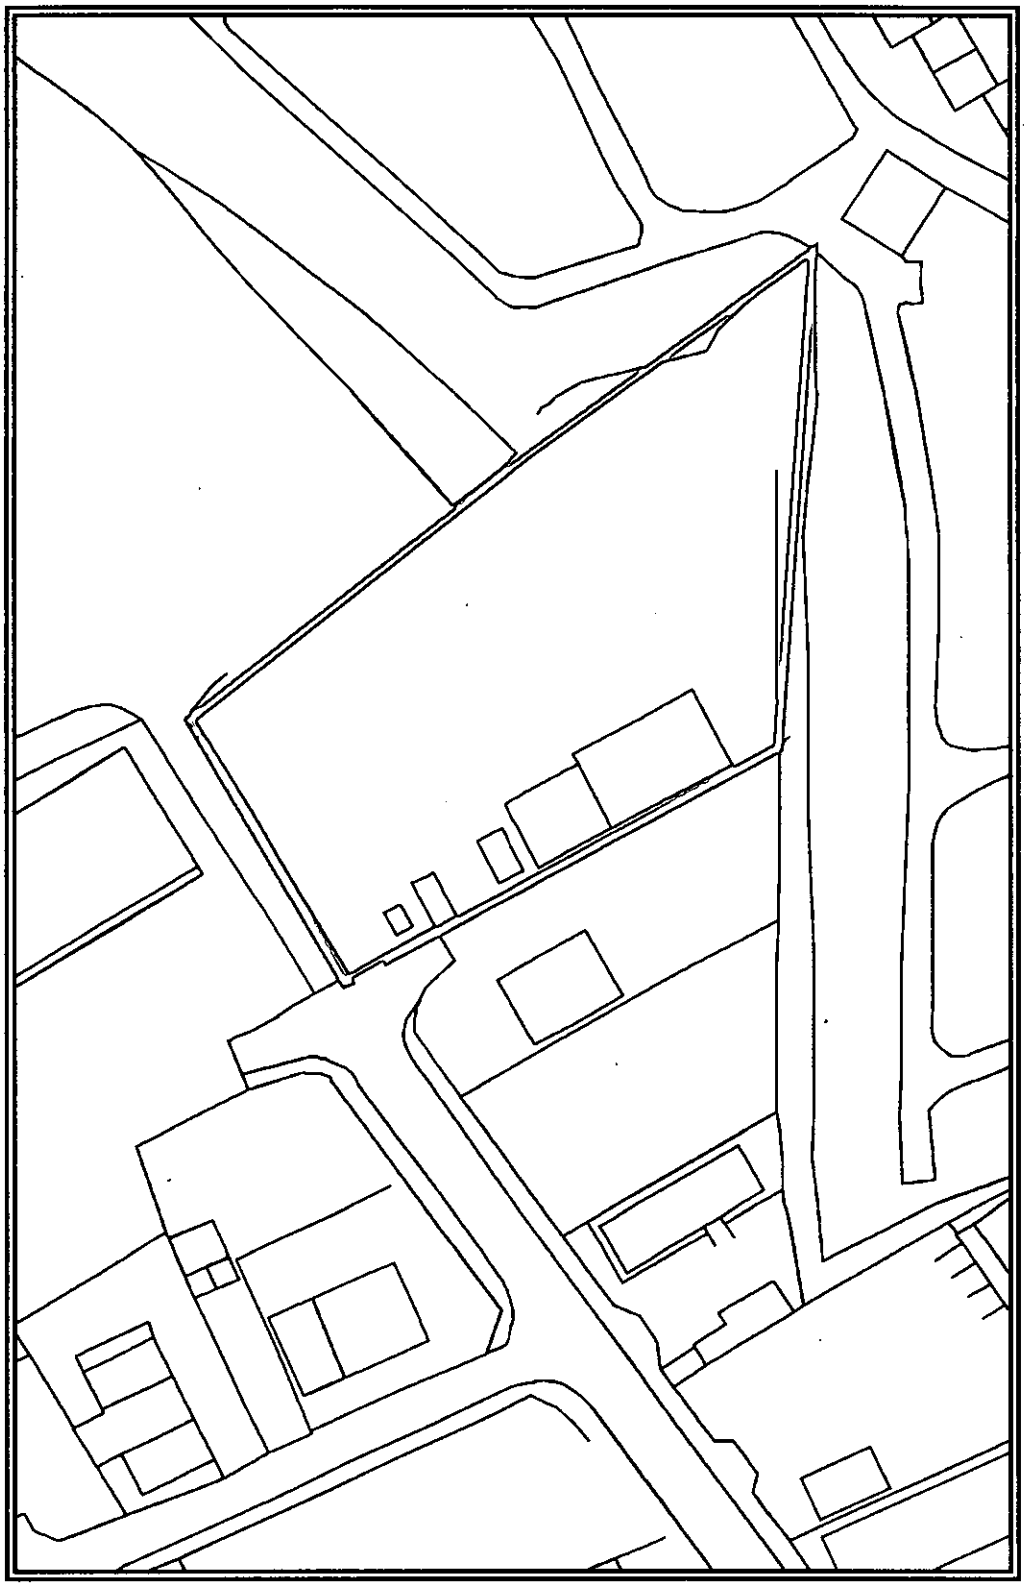

© Crown Copyright Licence No. LA 076562

30-31, Shutterton Industrial Estate, Exeter Road, Dawlish


Location Map
OSGR 969 785

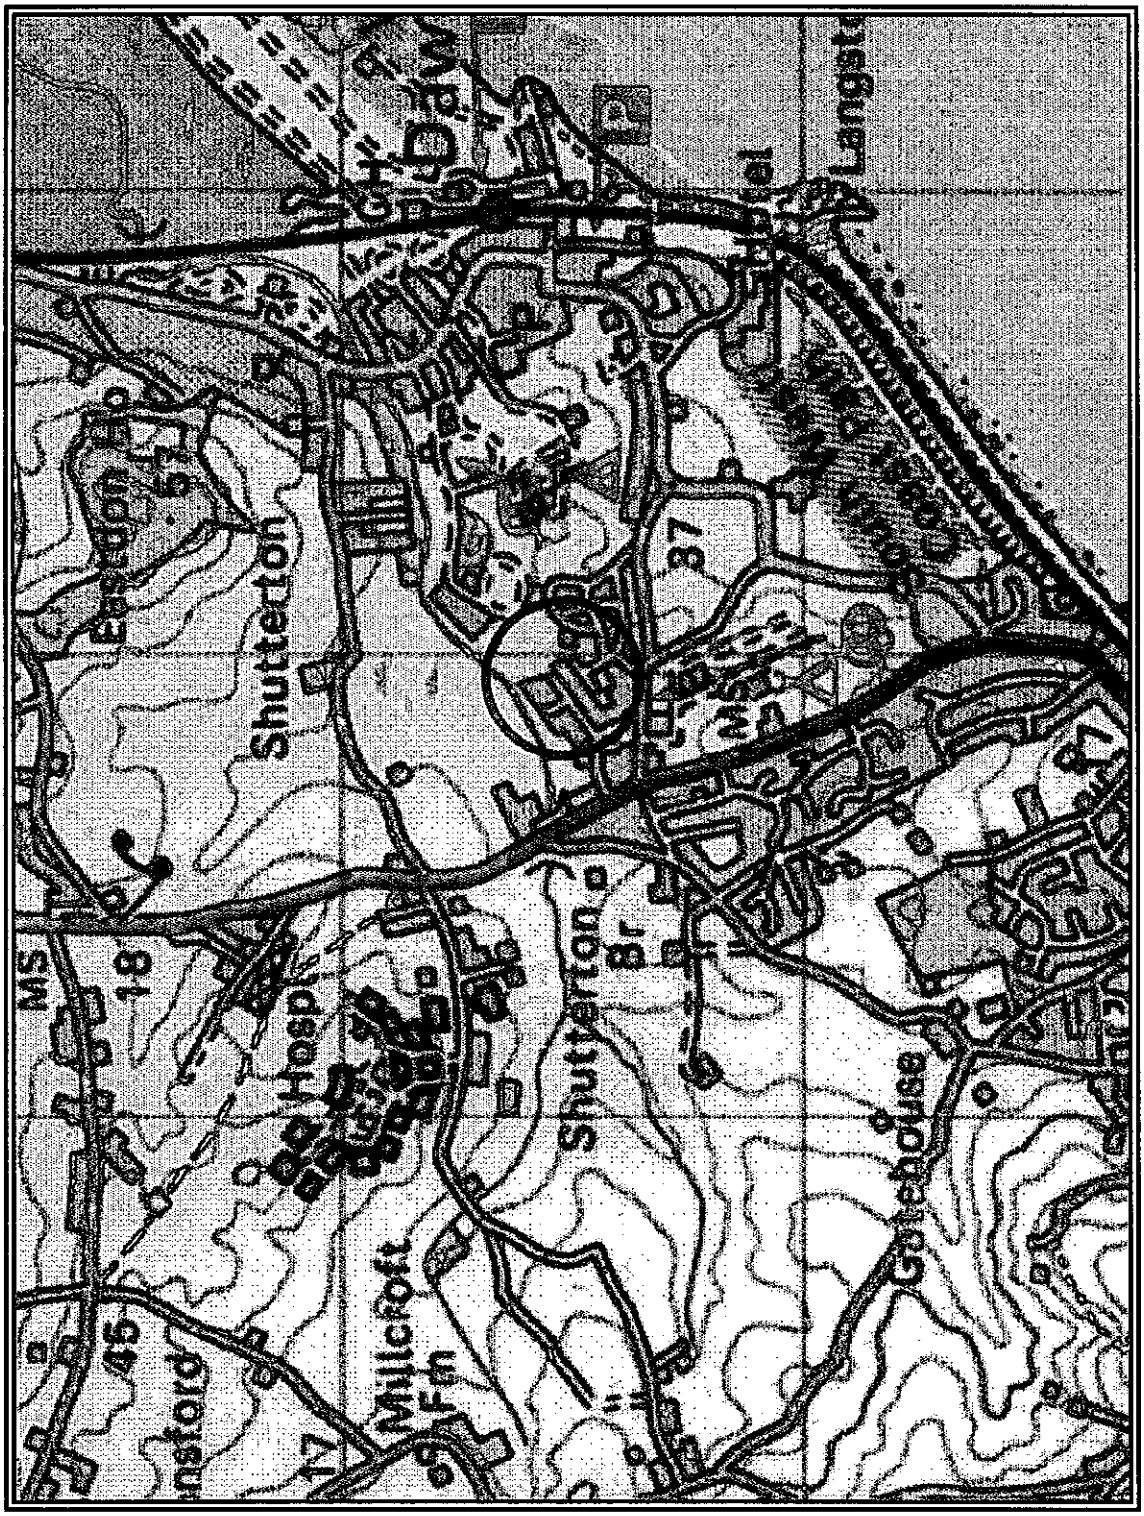

© Crown Copyright Licence No. LA 076562

30-31, Shutterton Industrial Estate, Exeter Road, Dawlish

Location Map
OSGR 969 785

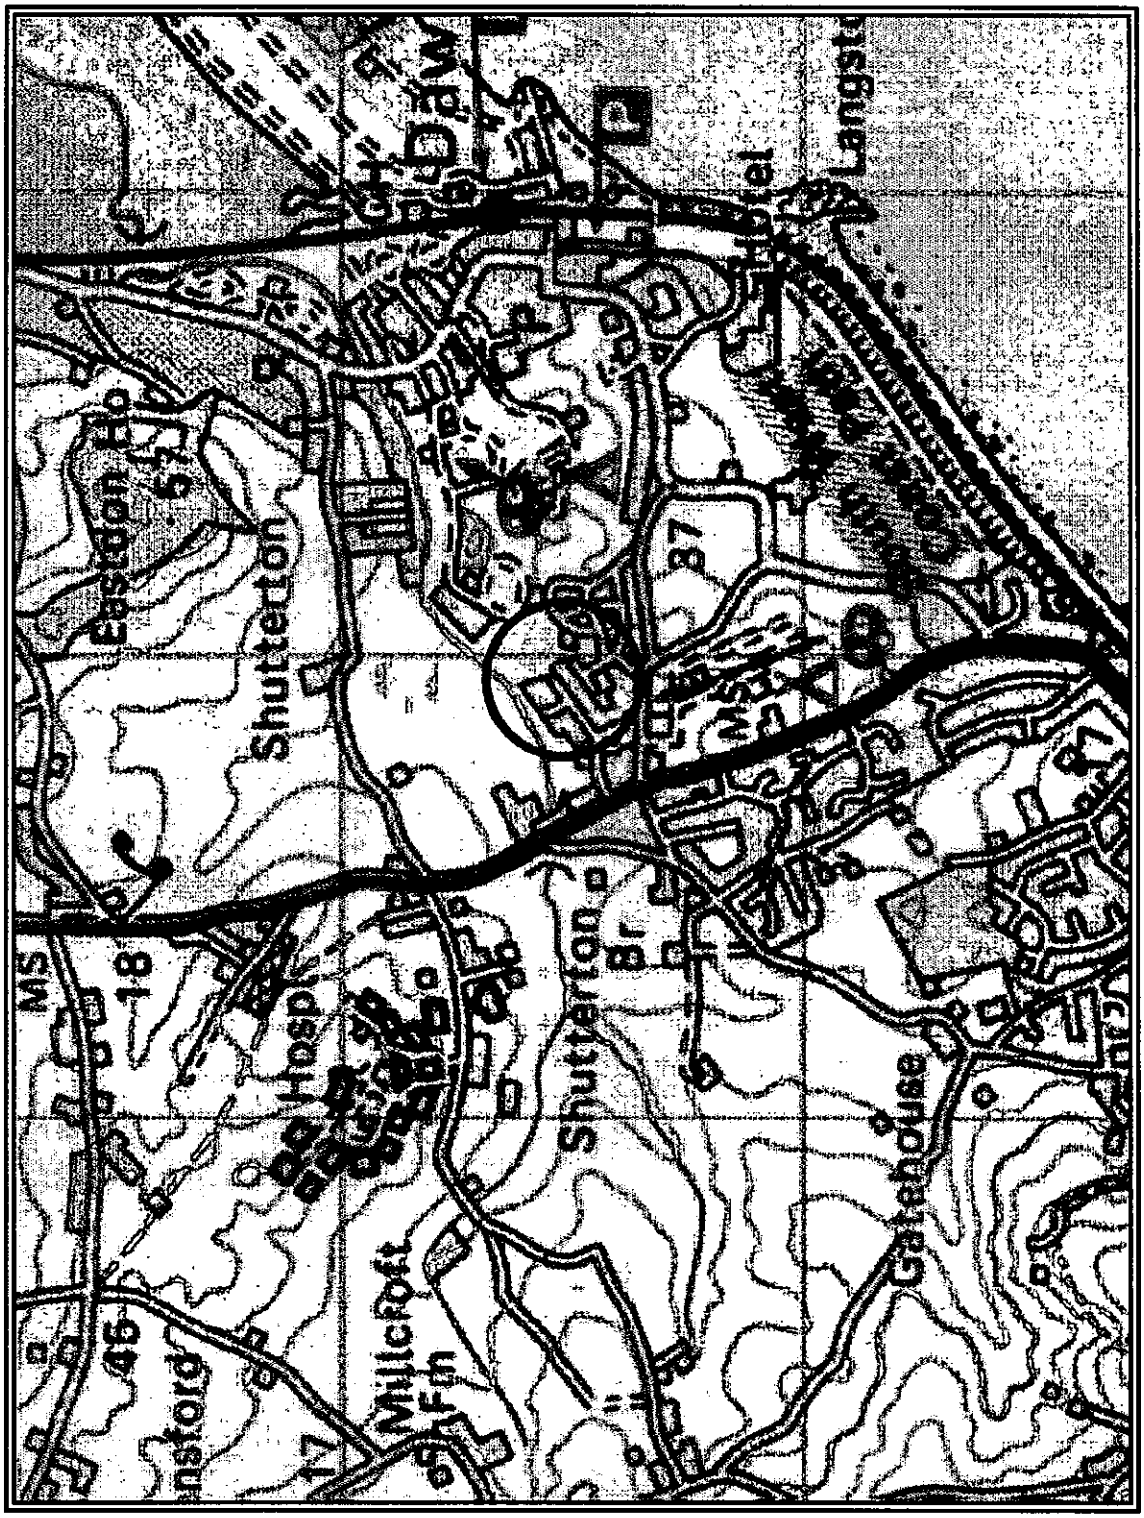

© Crown Copyright Licence No. LA 076562